

AC 700-9




All Terrain Crane

700T CAPACITY CLASS

DIMENSIONS

AC 700-9

ABMESSUNGEN · ENCOMBREMENT · DIMENSIONI ·
DIMENSIONES · DIMENSÕES · РАЗМЕРЫ

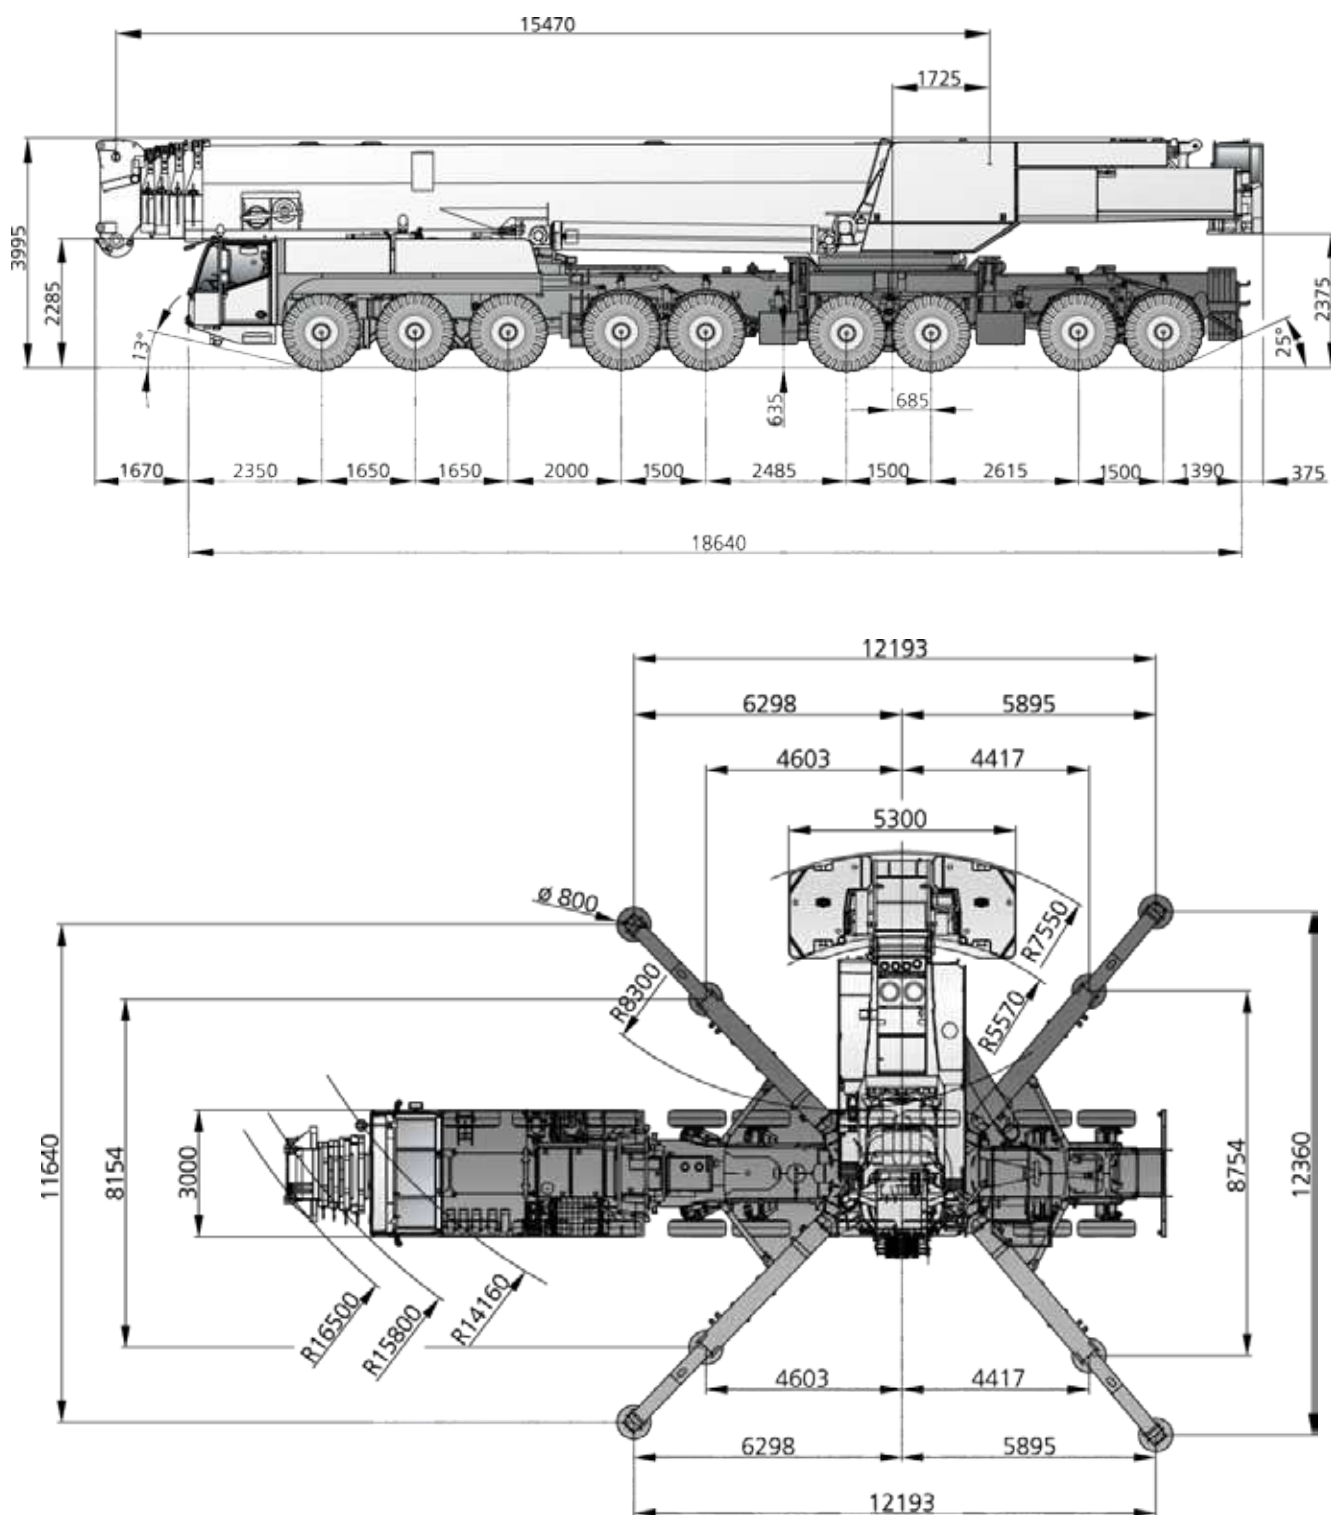

Loads with reduced outrigger base on request
 Traglasten mit verkürzter Abstützbasis auf Anfrage
 Capacities de levage base réduite sur demande
 Portate con base stabilizzatori ridotta disponibili su richiesta
 Capacidad de carga con bases de apoyo reducidas, disponibles bajo demanda
 Cargas com base do estabilizador reduzida a pedido
 Нагрузки при уменьшенной площади опор по заявке


SPECIFICATIONS

AC 700-9

TECHNISCHE DATEN · CARACTÉRISTIQUES · DATI TECNICI ·

DATOS TÉCNICOS · ESPECIFICAÇÕES · ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ

											
	Total										
8,5 t	62,0 t	18x8x16	385/95R25	–	–	–	–	–	X	X	–
12,0 t	108,0 t	18x8x16	385/95R25	–	X	–	–	–	X	–	5,7 t
12,0 t	108,0 t	18x8x16	385/95R25	–	X	–	–	–	–	X	4,7 t
13,7 t	123,0 t	18x8x16	385/95R25	40-1-26	X	X	X	–	X	X	–
14,5 t	125,0 t	18x8x16	385/95R25	40-1-26	X	–	X	X	X	X	–
15,5 t	139,0 t	18x8x16	385/95R25	40-1-26	X	X	X	X	X	–	5,7 t
15,5 t	139,0 t	18x8x16	385/95R25	40-1-26	X	X	X	X	–	X	4,7 t

	1	Road Travel · Straßenfahrt · Déplacement sur route · Trasporto su strada · Marcha por carretera · Percurso em rodovia · Движение по дорогам
	2	Manually steered · Manuell gelenkt · Dirigé manuelle · Sterzatura manuale · Dirección manual · Manobra manual · В режиме ручного управления
	3	Crab steer mode · Hundegang · Marche en crabe · Marcia a granchio · Marcha cangrejo · Modo de translação lateral · Режим поворота на всех колесах «крабовый ход»

			
	185 t	185 t	75 km/h ¹⁾
	550 mm	550 mm	

¹⁾ Depending on tire type, size and country specific legislation · Abhängig von Reifentyp, Reifengröße sowie länderspezifischer Gesetzgebung · En fonction du type et de la taille de pneus ainsi que de la législation locale · In base al tipo e alla dimensione dei pneumatici, nonché alle normative locali applicabili · Según tipo de neumático, tamaño y legislación del país · Dependendo do tipo e tamanho do pneu e da legislação específica do país · Зависит от типа шин, размера и требований законодательства страны

	
	385 / 95 R25 14.00 R25
	35 %
	40 %


				
				
1	136 m ³ /min	135 kN	26 mm	550 m
2	150 m ³ /min	135 kN	26 mm	770 m
	0,7 min ⁻¹			
	ca. 480 s (15,5 – 60 m)			
	ca. 120 s (-5° – +83°)			

					
1	13,6	15-0-26	9	900	2,0 m
2	27,0	40-1-26	9	1200	2,7 m
3	40,3	40-1-26	9	1200	2,7 m
4	53,5	100-3-26	9	1800	3,0 m
5	66,5	100-3-26	9	1800	3,0 m
6	79,4	100-3-26	9	1800	3,0 m
7	92,2	100-3-26	9	1800	3,0 m
8	104,8	160-5-26	9	2200	3,0 m
9	117,3	160-5-26	9	2200	3,0 m
10	129,7	160-5-26	9	2200	3,0 m
11	142,0	160-5-26	9	2200	3,0 m
12	154,1	200-7-26	9	2600	3,0 m
13	166,1	200-7-26	9	2600	3,0 m
14	178,1	200-7-26	9	2600	3,0 m
15	189,8	200-7-26	9	2600	3,0 m
16	201,5	250-9-26	9	2800	4,5 m
17	213,1	250-9-26	9	2800	4,5 m
18	224,5	250-9-26	9	2800	4,5 m
19	235,8	250-9-26	9 + S1	2800	4,5 m
20	247,0	320-11-26	9 + S1	3500	4,5 m
21	258,1	320-11-26	9 + S1	3500	4,5 m
22	269,1	320-11-26	9 + S1	3500	4,5 m
23	280,0	320-11-26	9 + S1	3500	4,5 m
24	290,7	320-13-26	9 + S1	4000	4,5 m
25	301,4	320-13-26	9 + S1	4000	4,5 m
26	312,0	320-13-26	9 + S1	4000	4,5 m






COUNTERWEIGHT

GEGENGEWICHT · CONTREPOIDS · CONTRAPPESO ·
CONTRAPESO · CONTRAPESO · ПРОТИВОВЕС

AC 700-9

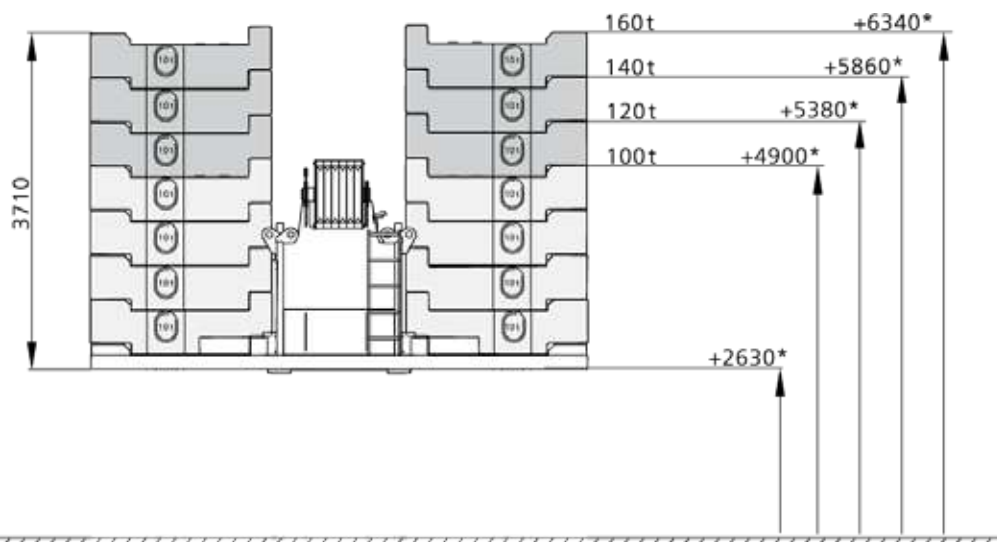

* Tail swing above ground · Durchschwenkhöhe über Boden · Giration AR au-dessus du sol · Oscillazione posteriore sul livello del suolo · Radio de giro trasero sobre el suelo · Giro da traseira acima do solo · Вынос хвостовой части над поверхностью

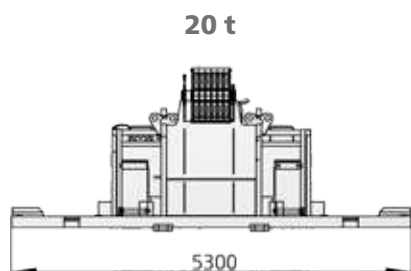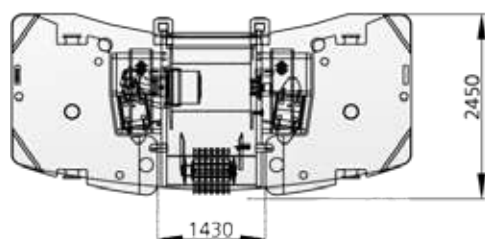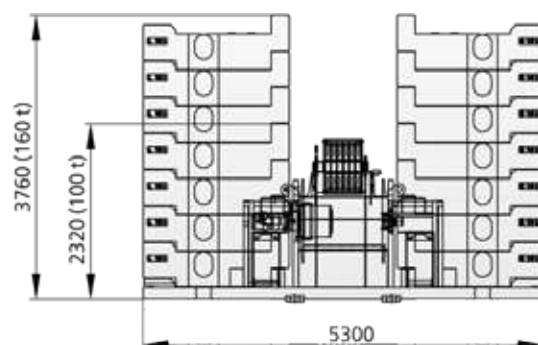


DEMAG
A TEREX BRAND

EQUIPMENT

AC 700-9

EINRICHTUNGEN · ÉQUIPEMENT · EQUIPAGGIAMENTO ·
EQUIPAMIENTO · EQUIPAMENTO · ОБОРУДОВАНИЕ


Superstructure with luffing cylinder · Oberwagen mit Wippzylinder ·
Tourelle avec vérin de relevage · Sovrastruttura con cilindro di impennatura ·
Superestructura con cilindro de elevación · Superestrutura com pistão elevatório ·
Надстройка с цилиндром управления вылетом стрелы

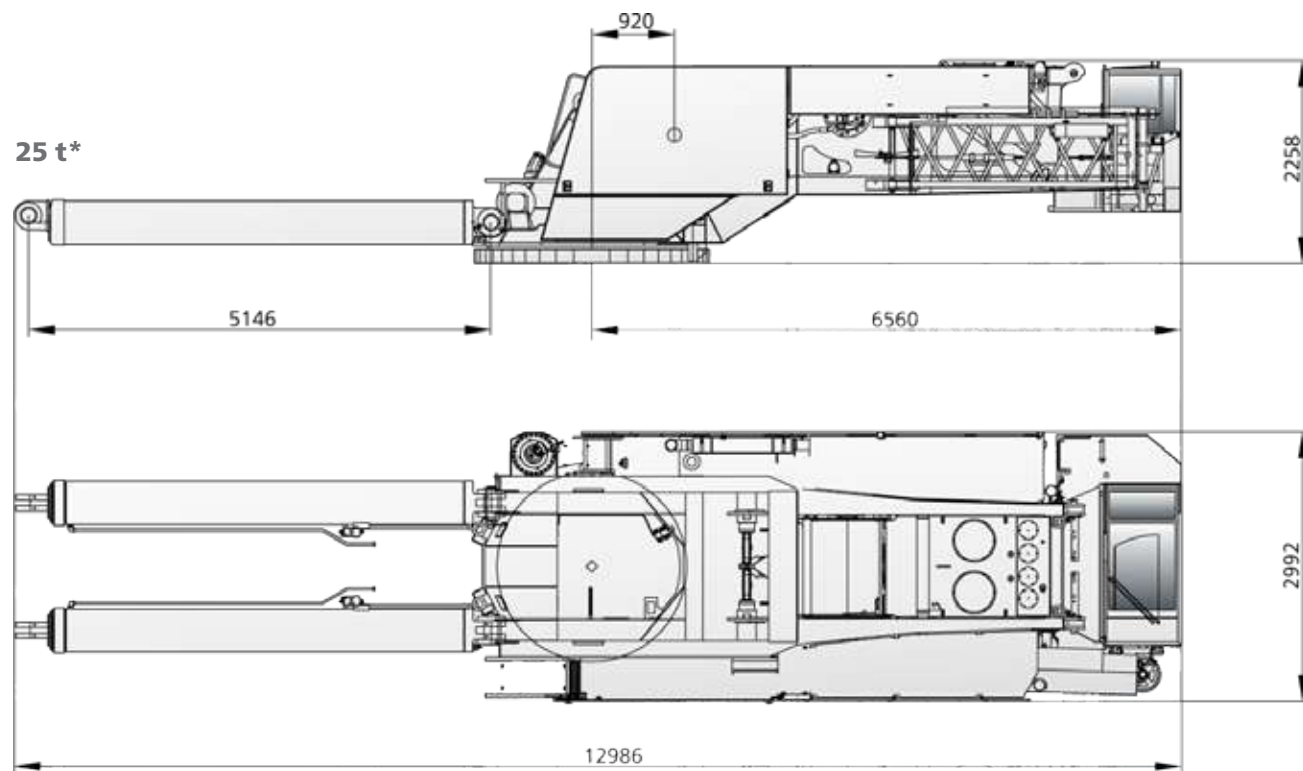

* incl. luffing cylinder · inkl. Wippzylinder · avec vérin de relevage · incl. cilindro di impennatura · incl. cilindro de elevación ·
Incl. pistão elevatório · Вкл. цилиндр управления вылетом стрелы

Main boom · Hauptausleger · Flèche principale · Braccio principale ·
Pluma principal · Lança principal · Главная стрела

42 t

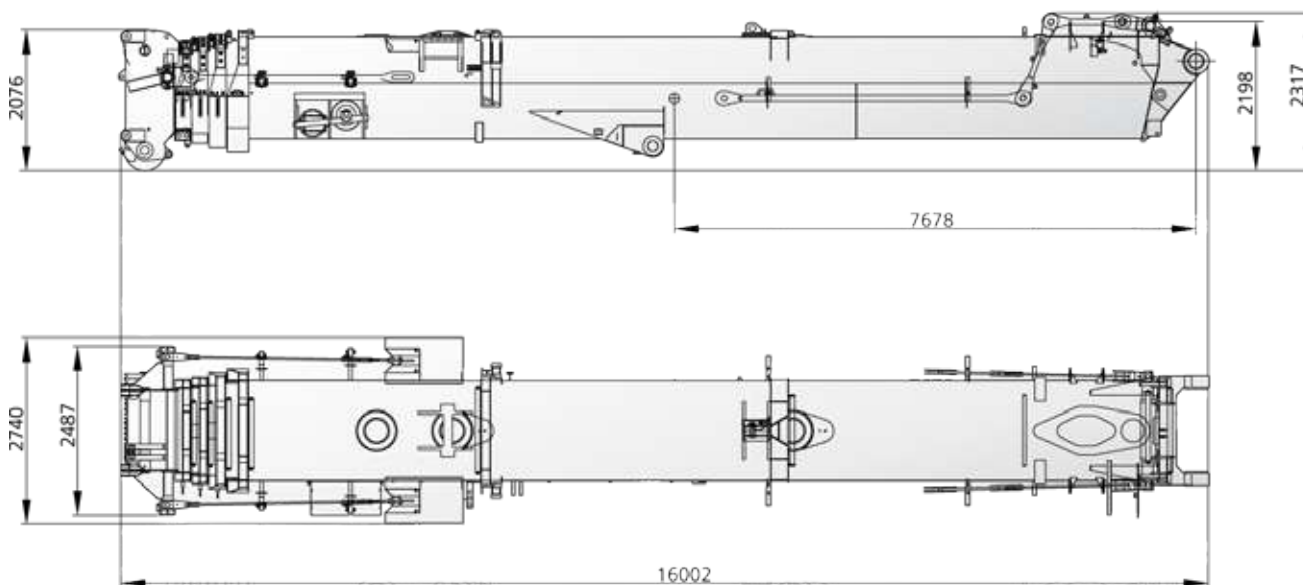


EQUIPMENT


AC 700-9

EINRICHTUNGEN · ÉQUIPEMENT · EQUIPAGGIAMENTO ·
EQUIPAMIENTO · EQUIPAMENTO · ОБОРУДОВАНИЕ

Sideways Superlift SSL

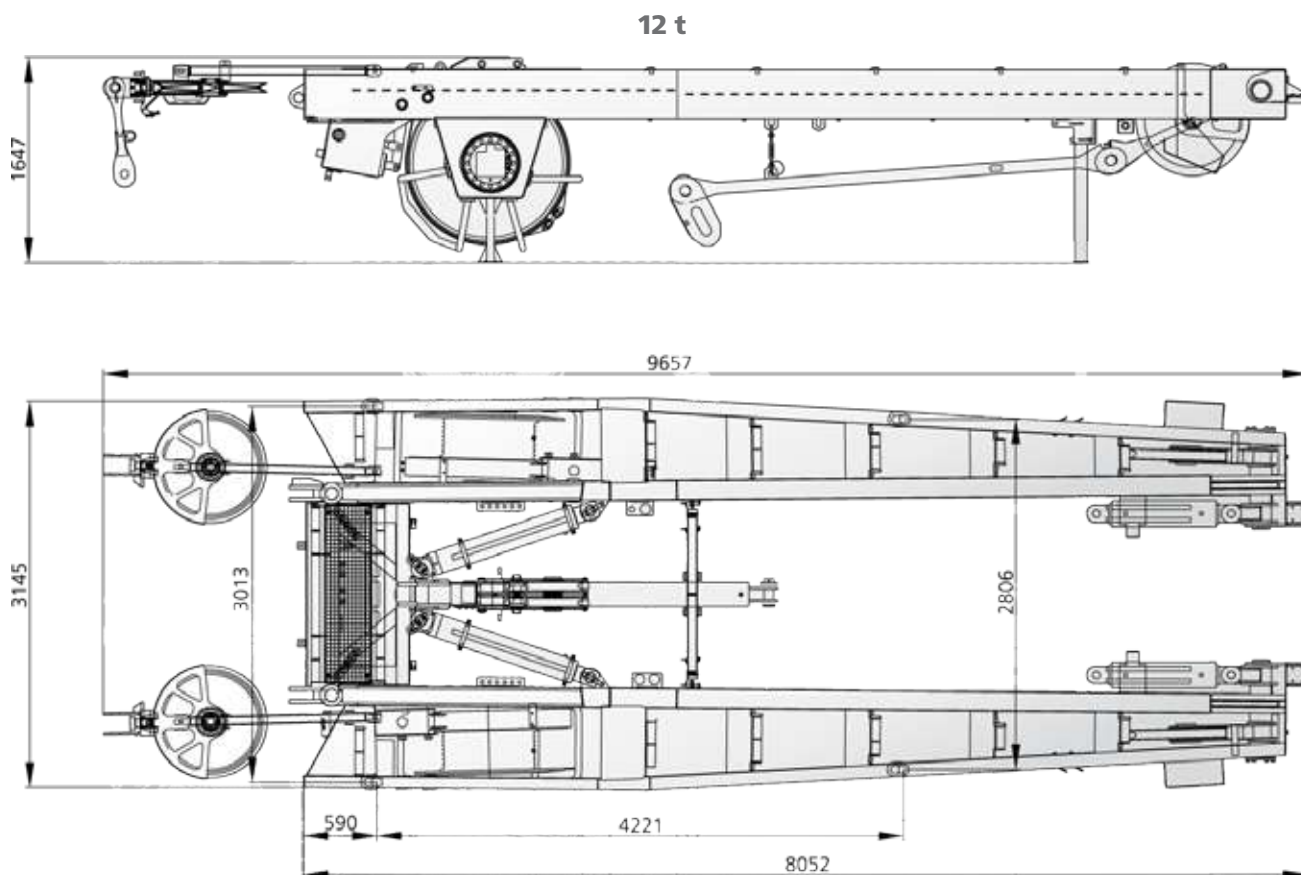

Outriggers · Abstützungen · Calage · Stabilizzatori · Estabilizadores · Estabilizadores · Выдвижные опоры

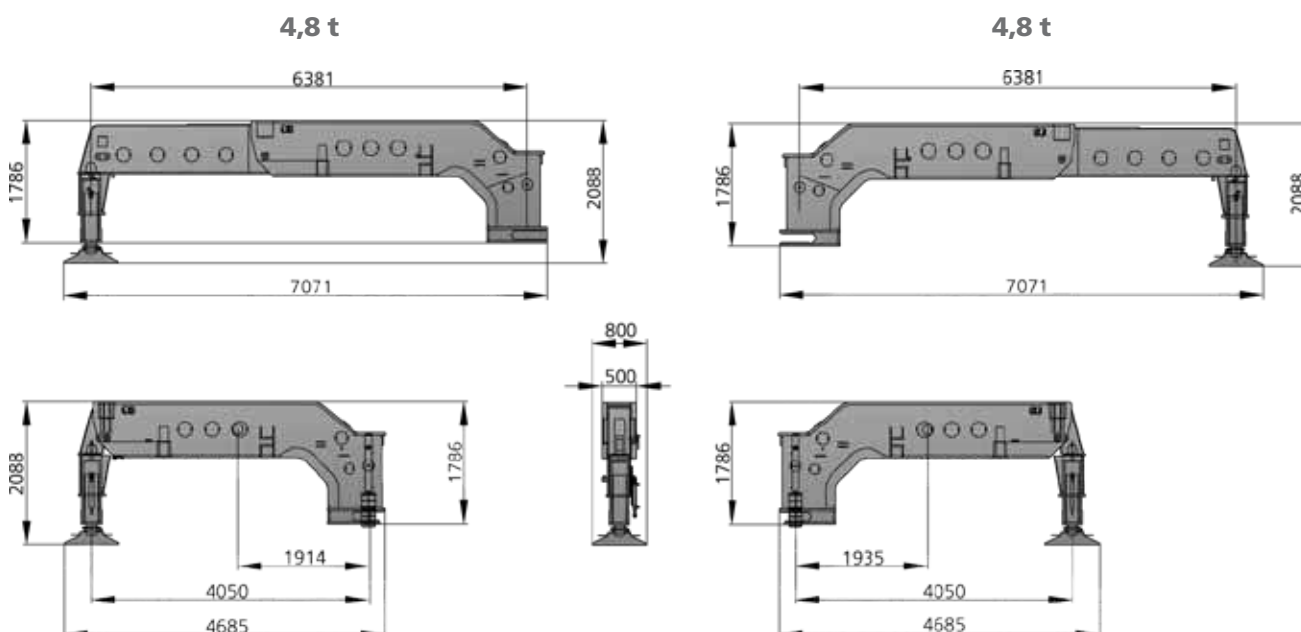


EQUIPMENT


EINRICHTUNGEN · ÉQUIPEMENT · EQUIPAGGIAMENTO ·
EQUIPAMIENTO · EQUIPAMENTO · ОБОРУДОВАНИЕ

AC 700-9

LF

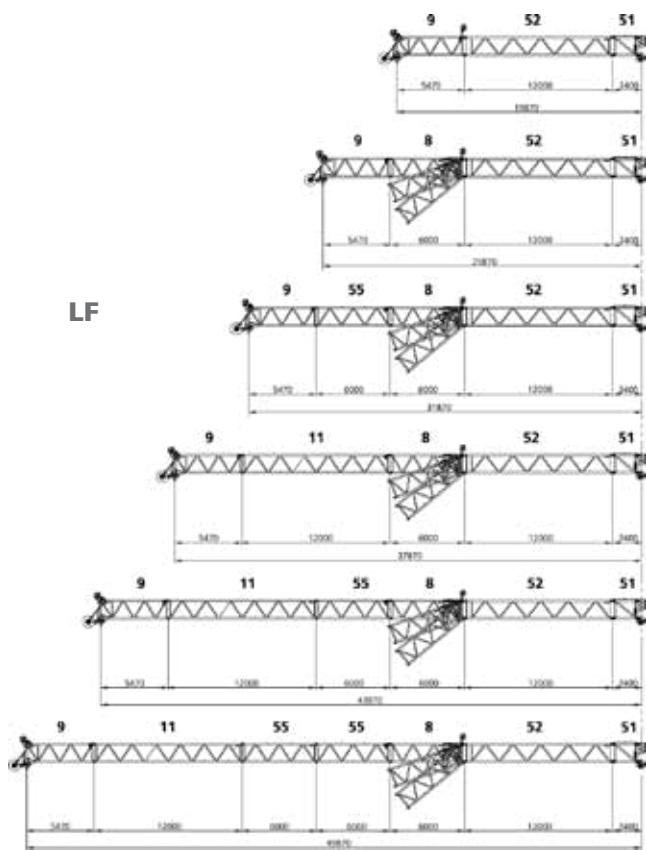

HAV

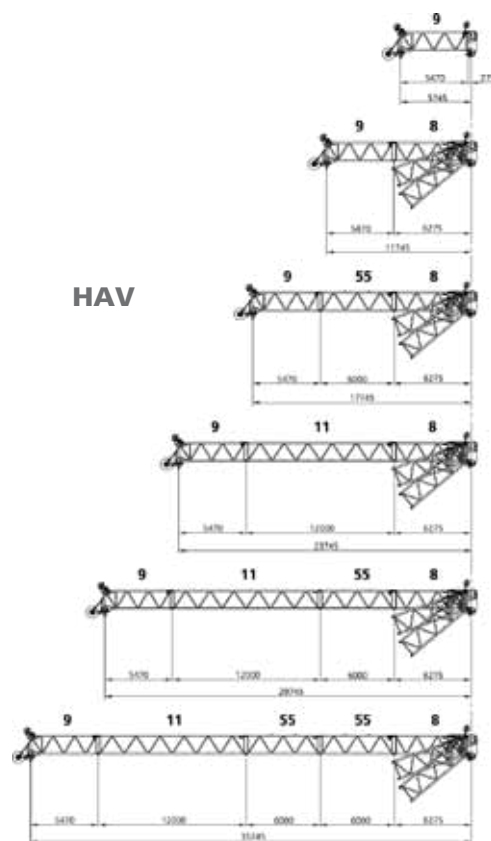

WIHI



EQUIPMENT

AC 700-9

EINRICHTUNGEN · ÉQUIPEMENT · EQUIPAGGIAMENTO ·
EQUIPAMIENTO · EQUIPAMENTO · ОБОРУДОВАНИЕ

